

for liquid

Type 970 Threaded

Safety valves made with brass Inlets <
Enclosed discharge valve with threaded connections <
Metal to metal sealing <

Example Applications

- Pumping systems and Hydraulic systems
- Thermal relief
- Waste water management
- Oil transfer
- Petrochemical industries
- Fire fighting equipment
- Water cooling and feeding systems
- Chemical process

Specifications

- Inlet connections: 1/2" to 2" threaded connections (depending on valve bore size) (for flanged connections see 980 Flanged datasheet)
- Temperature range: -50°C to +250°C (depending on body o'ring material)
- Pressure range: 0.3 to 36.0 bar (depending on valve bore size)

Materials of Construction

Component	Material	Grade
Inlet	Brass	CZ132 / CW602N
Outlet Body (10mm bore valve)	Bronze	SB-62 C8360
Outlet Body (15, 20 & 25mm bore valves)	Stainless Steel	1.4408 (316)
Spring	Stainless Steel	1.4310 (302)
Disc	Stainless Steel	1.4401 (316)



Approvals

- Designed in accordance with BS EN ISO-4126-1 &-7
- PED 2014/68/EU (CE)
- PE(S)R UK SI 2016 No. 1105 (UKCA)
- Leak tightness at 90% set pressure to API 527 and in accordance with EN ISO 4126-1



Seal Materials


This valve using metal to metal sealing. There is a choice of o'ring used for the sealed cap/lever

O'ring material	Temperature Range
Viton® (FKM)	-20°C to +250°C
Nitrile (NBR)	-30°C to +150°C
Silicone	-50°C to +250°C
EPDM	-40°C to +150°C


Standard seal materials shown, others are available.

Easing Gear / Lifting Gear / Top Fitting Options


- Sealed Cap (gas tight cap)



- Sealed lever (gas tight lever)



- Unsealed lever (not gas tight)



Technical information by bore size

Bore size	10mm (97010)			15mm (97015)			20mm (97020)			25mm (97025)			
	1/2"	3/4"	1"	1"	1 1/4"	1 1/2"	1"	1 1/4"	1 1/2"	1"	1 1/4"	1 1/2"	2"
Inlet Size	1/2"	3/4"	1"	1"	1 1/4"	1 1/2"	1"	1 1/4"	1 1/2"	1"	1 1/4"	1 1/2"	2"
Outlet Size	1"			1 1/2"			2"			2"			
Flow Area	78.5mm ²			177mm ²			314mm ²			491mm ²			
H - Height (Sealed Cap Version)	114mm			168mm			141mm			225mm			
Derated coefficient discharge of water below 100°C - Kdr	0.48			0.54			0.503			0.507			
Weight (approximate) Kg	1.0			2.1			3.5			4.2			
Set Pressure range - PED (CE) bar	0.3 to 28.0			0.3 to 33.0			0.6 to 36.0			0.48 to 23.5			
Relieving pressure/fully open pressure	Set pressure +10%												
Reseating pressure	Set pressure -20% (0.6 bar below 3.0 bar)												

- Leak tightness at 90% set pressure to API 527 and in accordance with EN ISO 4126-1


Standard INLET Connection Types

- BSP parallel male thread
- BSP taper male thread
- NPT male thread
- BSP parallel female thread (limited option)

Standard OUTLET Connection Types

- BSP parallel female thread

Valve Drawing

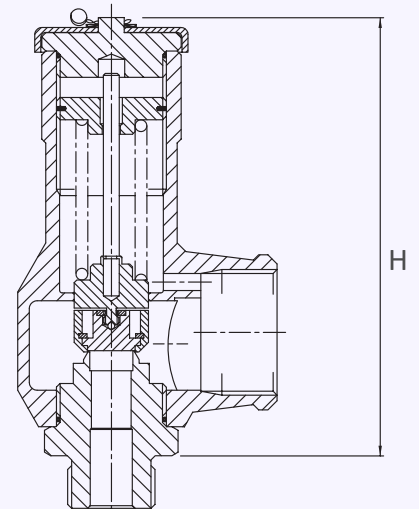

Valve Selection Guide

Valve type	Select Bore	Inlet Size	Inlet Thread Type	Top Fitting	O'ring material (for cap)	Set pressure
970	Select bore size from above table	Select inlet size from above table	Select Inlet Thread type	Select easing gear/top fitting	See table	Set pressure from available range

EAC marking available upon request

***Please send your selected details to Seetru and we can provide the full ordering code, price and lead-time.**

Example of Valve Selection Process

Example Selection	970	15	1"	BSP parallel	Rota Lift	Viton	17.5 bar
	Valve Type	Bore = 15mm	Inlet Size	Inlet Thread Type	Top Fitting	O'ring	Set Pressure

Capacity Table - In accordance with EN ISO 4126-1

Water below 100°C at 10% accumulation - litres/min



Set Pressure		Bore Size (D0)			
		10mm	15mm	20mm	25mm
bar	psi	Litres/min of Water	Litres/min of Water	Litres/min of Water	Litres/min of Water
3	43.5	58	147	243	383
4	58	67	169	281	443
5	72.5	74	189	314	495
6	87.00	82	207	344	542
7	101.5	89	224	372	585
8	116	95	240	397	626
9	130.5	100	254	422	664
10	145	106	268	444	700
15	217.5	130	328	544	857
20	290	150	379	628	990
25	362.5	167	424	703	
28	406	177	449	744	
30	435		465	770	
33	478.5		487	807	
35	507.5			831	
36	522			843	

For any intermediate pressures/flows please contact Seetru